



RX 325

Racking fixtures for indoor and multi-tier use requiring mid-to-high intensity lighting applications.



Get in touch with Valoya, Inc

T 866 482 5692
E sales.us@valoya.com
W na.valoya.com




 **VALOYA**
Part of  **greenlux** Brand

PO Box 1272
Buffalo NY 14231-1272

RX 325

Designed as a replacement for HID lighting, the RX-series is a high power, dimmable LED luminaire with a high IP rating. The robust all aluminium build, passive cooling and tempered glass cover ensure a long lifetime in the most demanding of environments.

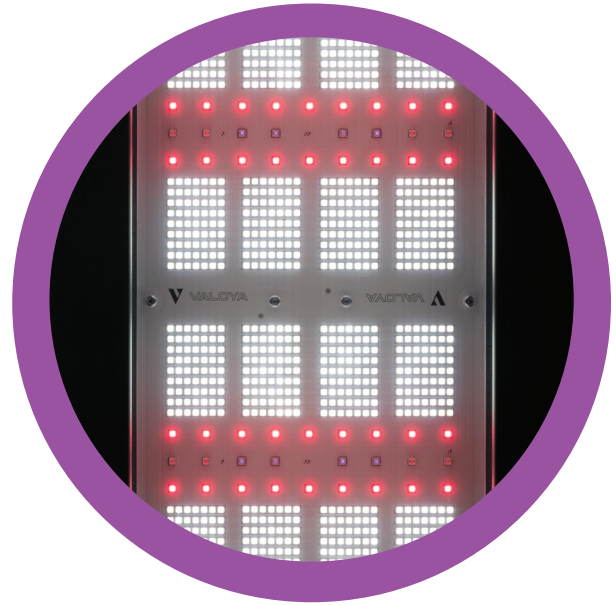

Technical Specification	RX325		
Spectrum	Solray385	SolrayX	S2
Power Consumption	330 W		
Voltage input	220 - 480 VAC		
Light output (PPF)	870 $\mu\text{mol/s}$	900 $\mu\text{mol/s}$	up to 1000 $\mu\text{mol/s}$
Efficacy (ePAR 280 - 800nm)	2.6 $\mu\text{mol/J}$	2.7 $\mu\text{mol/J}$	up to 3.0 $\mu\text{mol/J}$
Weight, luminaire and LED driver	13.1 lb (5.8 kg)		
Dimensions, luminaire (L x W x H)	347 x 181 x 176 mm (13.7" x 7.1" x 6.9")		
Cables	11.8" mains to LED driver, 26" luminaire to LED driver, 11.8" dimming cable		
Plug type	Open end (bare leads)/NEMA plugs optional		
Dimming	0-10V, PWM, Dim to Off		
L90 Q90	50,000+ h.		
Certifications / Approvals	DLC listed, cETLus marked, RoHS compliant		
Max. ambient operating temperature	40°C		
Cooling	Passive		
Water & impact protection	IP65		
Warranty	5 year limited warranty		

