




RX 600

Racking fixtures for indoor and multi-tier use requiring mid-to-high intensity lighting applications.

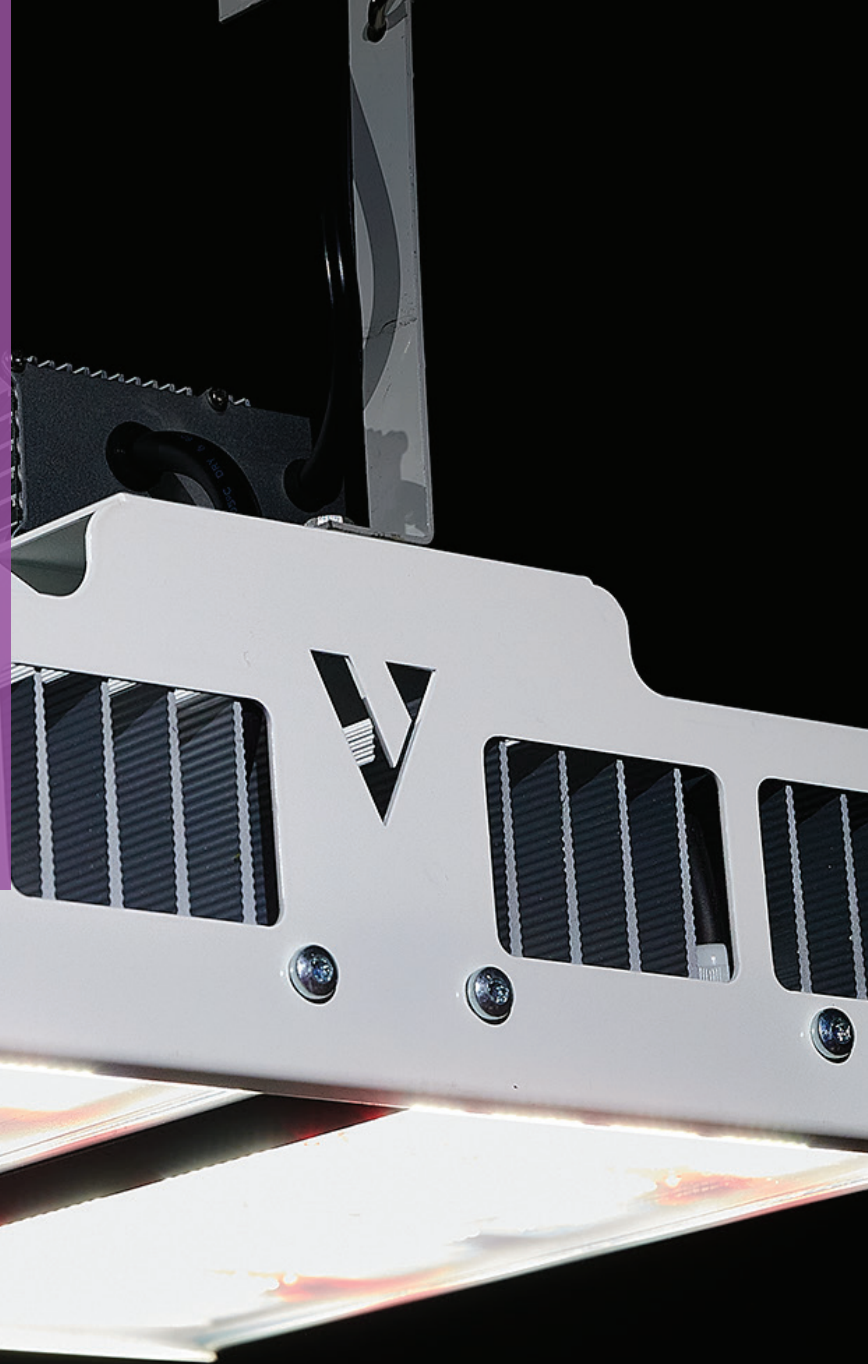

Get in touch with Valoya, Inc

T 866 482 5692
E sales.us@valoya.com
W na.valoya.com




 **VALOYA**
Part of  greenlux Brand

PO Box 1272
Buffalo NY 14231-1272

RX 600

Designed as a replacement for HID lighting, the RX-series is a high power, dimmable LED luminaire with a high IP rating. The robust all aluminium build, passive cooling and tempered glass cover ensure a long lifetime in the most demanding of environments.

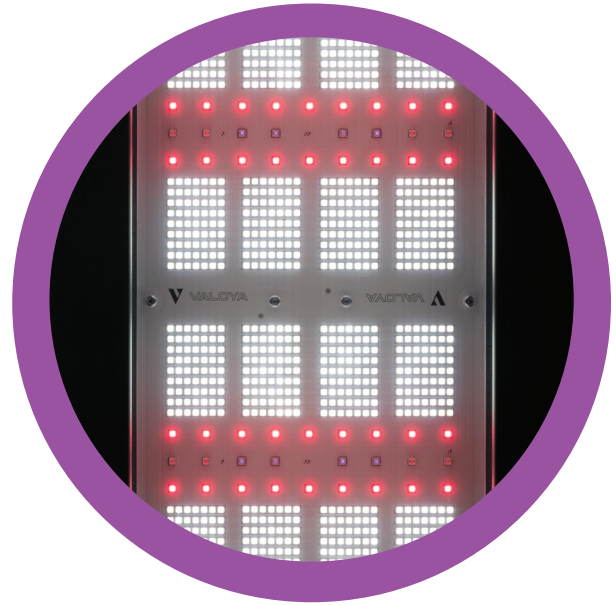

Technical Specification	RX600	
Spectrum	Solray385	SolrayX
Power Consumption	653 W	658 W
Voltage input	220 - 480 VAC	
Light output (PPF)	1717 $\mu\text{mol/s}$	1750 $\mu\text{mol/s}$
Efficacy (ePAR 280 - 800nm)	2.62 $\mu\text{mol/J}$	2.66 $\mu\text{mol/J}$
Weight, luminaire and LED driver	25.6 lb (11.6 kg)	
Dimensions, luminaire (L x W x H)	347 x 400 x 176 mm (13.7" x 15.7" x 6.9")	
Cables	11.8" mains to LED driver, 26" luminaire to LED driver, 11.8" dimming cable	
Plug type	Open end (bare leads)/NEMA plugs optional	
Dimming	0-10V, PWM, Dim to Off	
L90 Q90	50,000+ h.	
Certifications / Approvals	DLC listed, cETLus marked, RoHS compliant	
Max. ambient operating temperature	40°C	
Cooling	Passive	
Water & impact protection	IP65	
Warranty	5 year limited warranty	

